

## JW Pro Series JW-HT144N

N-type

Bifacial Singe Glass Mono Module


### 550-575W

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018: Occupational health and safety management systems

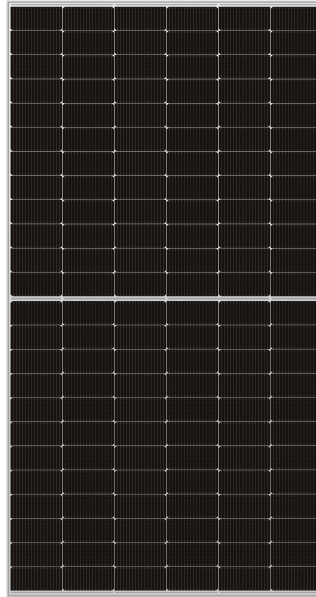

### 575W

Maximum Power Output

### 22.26%

Maximum Module Efficiency

### 0~+5W

Power Output Tolerance



#### High Power Output

SMBB technology reduces the distance between busbars and finger grid lines, improving reliability and increasing output



#### ZERO LID (Light Induced Degradation)

N-type solar cell has no LID naturally which can increase power generation



#### Lower LCOE

Higher bifaciality, higher power output and lower BOS cost



#### Better Weak Illumination Response

Higher power output even under low-light environments like on cloudy or foggy days



#### Better Temperature Coefficient

Higher power generation under working conditions, thanks to passivating contact cell technology




#### Lighter Module Weight

Reduces weight by more than 20% compared to bifacial double glass module

### Jolywood Delivers Reliable Performance Over Time

- Leader of N-type bifacial manufacturer
- Full-automatic facility and industry-leading technology
- Best-in-class durability and reliability
- BNEF Tier One

### Linear Performance Warranty

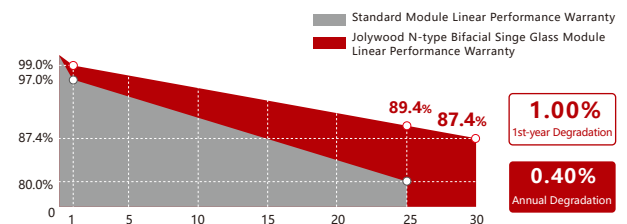

12 Years Product Material & Workmanship

30 Years Linear Performance Warranty

# JW-HT144N Series | N-type Bifacial Single Glass Mono Module

## Electrical Properties | STC\*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	550	555	560	565	570	575
MPP Voltage (Vmp) (V)	42.0	42.2	42.4	42.6	42.8	43.0
MPP Current (Imp) (A)	13.10	13.16	13.21	13.27	13.32	13.38
Open Circuit Voltage (Voc) (V)	50.28	50.48	50.68	50.88	51.08	51.28
Short Circuit Current (Isc) (A)	14.00	14.06	14.12	14.18	14.24	14.30
Module Efficiency (%)	21.29	21.48	21.68	21.87	22.07	22.26

\*STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, AM1.5  
The data above is for reference only and the actual data is in accordance with the practical testing  
Power Measurement Tolerance ±3%

## Electrical Properties | NOCT\*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	417	421	424	428	432	436
MPP Voltage (Vmp) (V)	39.5	39.6	39.8	40.0	40.2	40.4
MPP Current (Imp) (A)	10.56	10.61	10.65	10.70	10.74	10.79
Open Circuit Voltage (Voc) (V)	48.0	48.2	48.4	48.6	48.7	48.9
Short Circuit Current (Isc) (A)	11.18	11.23	11.28	11.33	11.38	11.42

\*NOCT: Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1 m/s

## Operating Properties

Operating Temperature (°C)	-40°C~+85°C
Maximum System Voltage (V)	1500V DC (IEC)
Maximum Series Fuse Rating (A)	30
Power Tolerance	0~+5W
Bifaciality*	80%

\*Bifaciality=Pmaxrear (STC) /Pmaxfront (STC) , Bifaciality tolerance:±5%

## Temperature Coefficient

Temperature Coefficient of Pmax*	-0.300%/°C
Temperature Coefficient of Voc	-0.250%/°C
Temperature Coefficient of Isc	+0.045%/°C
Nominal Operating Cell Temperature (NOCT)	42±2°C

\*Temperature Coefficient of Pmax±0.03%/°C

## Mechanical Properties


Cell Size	182.00mm*91.00mm
Number of Cells	144pcs(6*24)
Module Dimension	2278mm*1134mm*30mm
Weight	27.5kg
Front Glass*	3.2mm
Frame	Anodized Aluminium Alloy
Junction Box	IP68 (3 diodes)
Length of Cable	4.0mm <sup>2</sup> , +300mm/-180mm (Cable length can be customized)

\*Heat strengthened glass




## With Different Power Generation Gain (regarding 550W as an example)

Power Gain (%)	Peak Power (Pmax) (W)	MPP Voltage (Vmp) (V)	MPP Current (Imp) (A)	Open Circuit Voltage (Voc) (V)	Short Circuit Current (Isc) (A)
10	594	42.0	14.13	50.2	14.97
15	616	42.0	14.65	50.2	15.51
20	638	42.1	15.17	50.3	16.06
25	660	42.1	15.69	50.3	16.61
30	682	42.1	16.20	50.3	17.16

## Engineering Drawing (unit: mm)

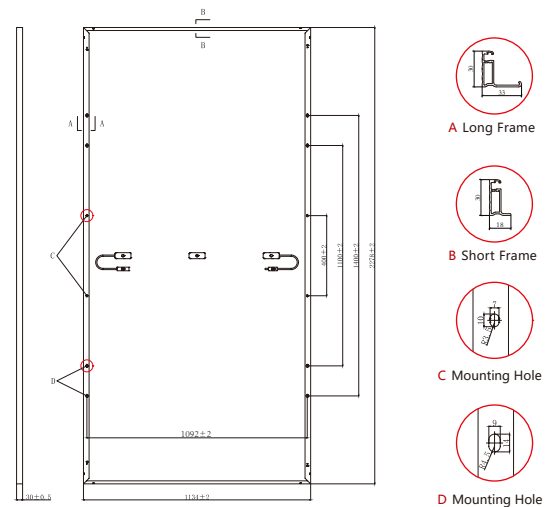

## Characteristic Curves | HT144N-550

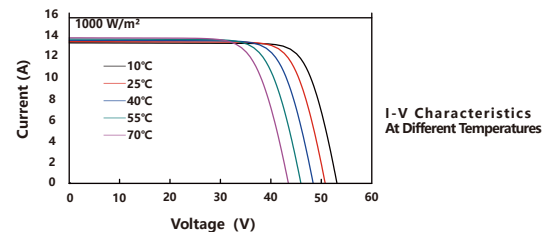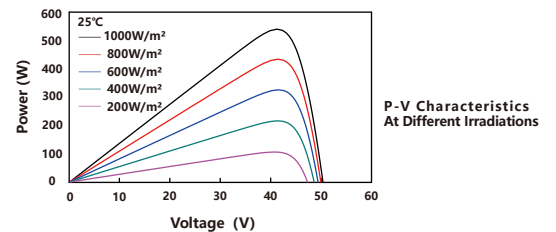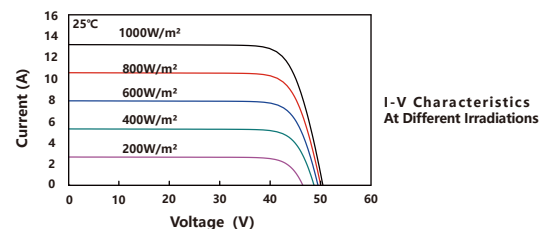

## Packaging Configuration

Packing Type	20'GP	40'GP	40'HQ
Piece/Pallet		36	
Pallet/Container	4	10	20
Piece/Container	144	360	720

\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

